



JETRIX 3015FQ

SIMPLE & PERFECT It looks simple and it's perfect

Wide format UV-curable flatbed inkjet printer

InkTec Inkjet Technology provides trustworthily high quality print with outstanding productivity.

Without reference to application or industry, InkTec has the UV printer to match your needs.

InkTec designs and manufactures UV printers, JETRIX series, and high quality UV ink, with using the most advanced technology and highly skilled staff.

About InkTec

Since its establishment in 1992 with the slogan, “Today’s technology is never good enough for us,” InkTec has enjoyed exceptional growth and built the reputation for being a leading printer supplies manufacturer. InkTec has developed relationships with business partners in more than 120 countries and in 2003 constructed a fully-automated 13,770.80m² production facility to meet large market demands and prepare for continued growth

As a world-class and industry leading company in inkjet applications, InkTec has also created next generation technology such as UV-curing Inks, Conductive Inks, Printed Circuit Board based on inkjet technology and Wide format UV-curable inkjet Printers, enabling InkTec not only to expand the business but also to contribute toward the development of inkjet applications. We guarantee 100% satisfaction with all of our products and services.

→ INKTEC PRODUCTS

Desk-Top
Division

LFP
Division

Refilling Machine
Division


UV Printer
Division

Electronic Material
Division



Specialty of **JETRIX** 3015FQ

*The InkTec JETRIX is the perfect solution for indoor, outdoor applications and industrial applications.
Reliable, and enables high-quality printing on every work.
With its Robust Flat Bed, Smart and Strong Vacuum
and Versa Drop & High Quality*

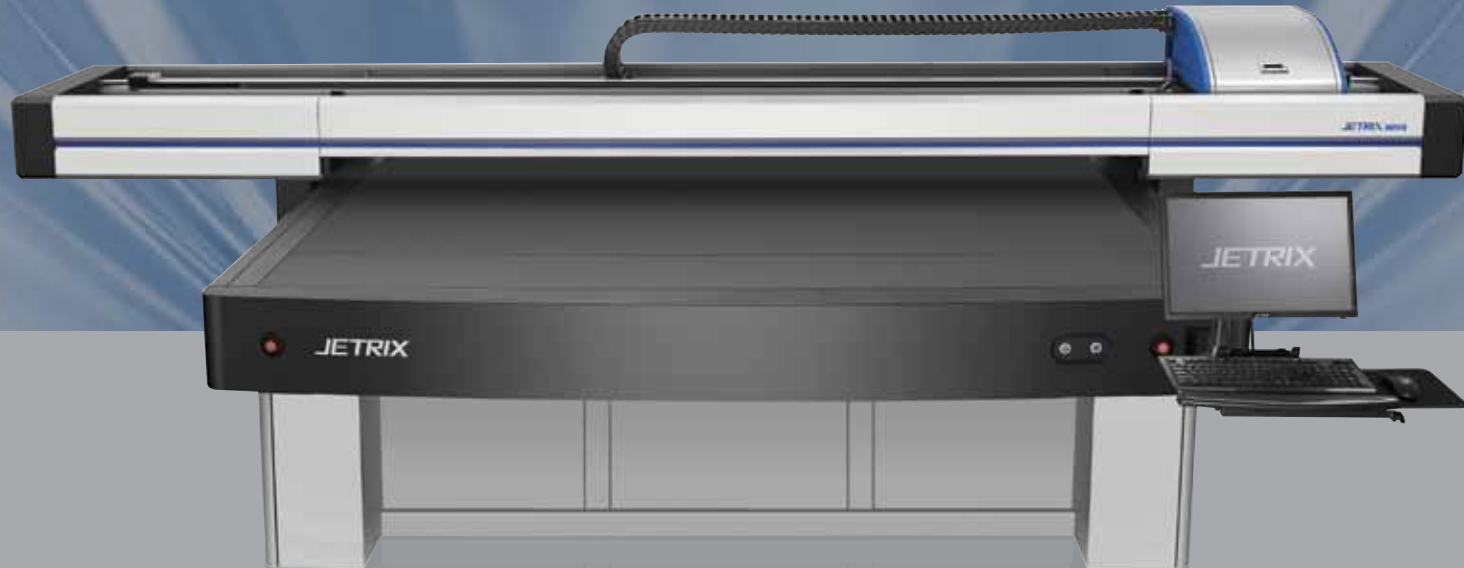



1

Head Part

- ▶ Advantage of Spectra Head
 - Robust durability
 - True Grayscale with versa drop (from 10 to 30 picoliters)
 - Easy to install / simple build inside head carriage



4

Vacuum Part

- ▶ Strong vacuum with auto power adjustment system
 - Easy to use Intelligent vacuum table system



2

Head Carriage Part

- ▶ Head auto height adjustment system (Anti-crash system)
 - Edge sensors each side of head carriage can detect and gauge between head and material for automatically adjust head height



5

Ink Refill Part

- ▶ Auto Ink cleaning & Ink refill system
 - Auto ink supply and auto purging system
 - Easy to refill with 2 liter bulk ink (Pack type)



3

Flatbed Part

- ▶ Robust flatbed itself
 - Up to media weight 500kg
 - True robust frame
 - Accurate table system



6

Interface Part


- ▶ Auto-self check maintenance system
 - User friendly color LCD panel with touch screen
 - Interactive customer support accessible

▶ Other features


- Variable Inks system > White, Varnish, Primer(Glass, Metal)
- Easy to load the rigid media with the media alignment bar
- White ink auto recirculation system



Front



Back



SIMPLE & PERFECT It looks simple and it's perfect

▣ Specification

Height	1430mm
Width	5338mm
Depth	2304mm
Weight	2 ton
Required Footprint	2500 × 6000mm
Country of Manufacture	Korea

▣ Print Width / Print Dimensions

Max Rigid Media Size	5 × 10 (ft)
Max Rigid Print Size	5 × 10 (ft)
Max Media Thickness	100mm

▣ Activities for Standard Routine Maintenance

The manufacturer has identified the following activities as standard routine maintenance. Frequency of the activity and the time required to perform are included.

Activity	Frequency	Time to Perform
Head Rail Wiping	Daily	1 ~ 5 minutes
Clean Heads/ Purge	Daily	1 ~ 5 minutes

▣ 5×10 Foot Boards per Hour (BPH)

Production	6.5 BPH
Quality 1	4.3 BPH
Quality 2	3.3 BPH
Fine Art	2.2 BPH

▣ Print Speeds for Bi Directional ※ true grayscale with versa drop, 10/ 20/ 30 picoliters

Printing Mode	Time	Size	Sqft / Hr	Sqm / Hr
Production	5m 56sec	5 × 10 (ft)	323	30
Quality 1	8m 54sec	5 × 10 (ft)	215	20
Quality 2	11m 52sec	5 × 10 (ft)	161	15
Fine Art	17m 48sec	5 × 10 (ft)	107	10

▣ UV Lamp Intensity Settings (One lamp on each side of print head)

UV lamps have shutter activated housings and can cure in single, double or post process mode

▣ Number of Colors

- 4 Colors (CMYK) with cleaning solution
- 8 Colors (CMYK, White, Primer(glass), Primer(metal), Varnish) with cleaning solution

▣ Rip Availability / Compatibility

 CALDERA |  ONYX |  WASATCH Rip software

▣ Power and Venting Requirements

Electrical Requirement	200 ~ 240V, Single phase, 50 ~ 60Hz
Compressed Air Requirement	0.65mpa
Other Power Requirement(s)	None
Venting Required	Yes
UV Light Exposure	N/A
Exposed Moving Parts	N/A
MSDS for OEM Ink Set	Upon Request

All product specifications are subject to change without prior notice.
Appearance of equipment ordered may be different from that of equipment shown in the catalogue.

JETRIX
www.jetrix.co.kr



InkTec[®]

1124 Shingil-dong, Danwon-gu, Ansan-city, Gyeonggi-do, Korea, 425-839
| TEL +82-31-490-6302/6272 | FAX +82-31-492-2041 | E-mail jetrix@inktec.com